



Corner connection of Lightbox profile Klick with corner-joints




Aluminum corner connector EV-A K60 is inserted into the notch and secured with allen screws.

Steel corner connector EV-S K60 is inserted into the notch and secured with allen screws.

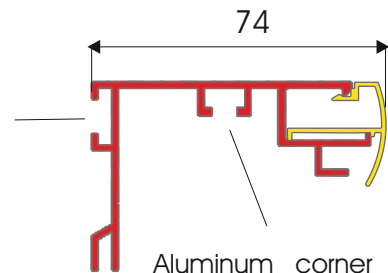

Aluminum corner connector EV-A K74 is secured with screws.

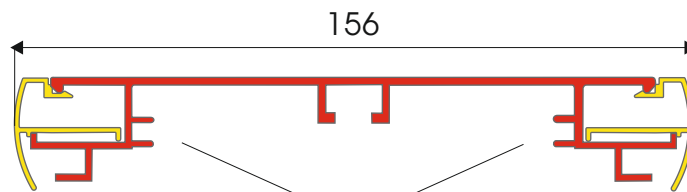

Corner connector EV-A K156 is inserted into the notch and screwed.

Dimensions of acrylic glass and back walls

Dimensions of acrylic glass:

Klick 60	External dimensions of the box	-32 mm
Klick 74	External dimensions of the box	-35 mm
Klick 156	External dimensions of the box	-35 mm

up to 4 mm acryl thickness

Dimensions of back wall:

Klick 60	External dimensions of the box	-36 mm
Klick 74	External dimensions of the box	-80 mm

Klick 60 up to 1,5 mm material thickness,
Klick 74 up to 3,5 mm material thickness